

TECH TIPS

Service Call:

Resetting GFI on Belt Drive Generator

Tools Needed:

Phillips Screwdriver
Jumper Wire

Model:

S80,100,120,Z80,135



Tech Tips Safety Rules



Danger

Failure to obey the instructions and safety rules in the appropriate Operator's Manual and Service Manual for your machine will result in death or serious injury. Many of the hazards identified in the operator's manual are also safety hazards when maintenance and repair procedures are performed.


Do Not Perform Maintenance Unless:

- You are trained and qualified to perform maintenance on this machine.
- You read, understand and obey:
 - manufacturer's instructions and safety rules
 - employer's safety rules and worksite regulations
 - applicable governmental regulations
- You have the appropriate tools, lifting equipment and a suitable workshop.

The information contained in this tech tip is a supplement to the service manual. Consult the appropriate service manual of your machine for safety rules and hazards.


Step 1

Locate and open the white generator box.

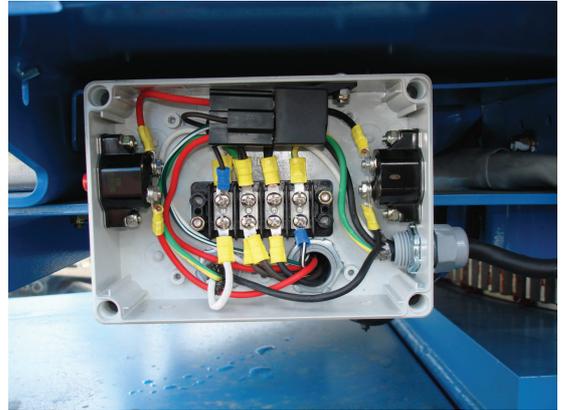


Step 2

Locate the three wire harness with the white, black, and green wires (some machines may have a green/yellow), coming from the generator.

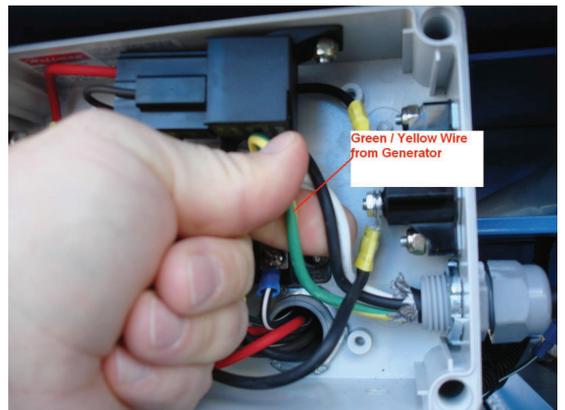

Step 3

Start machine and jump power from a 12V power supply to the green wire (or green/yellow).

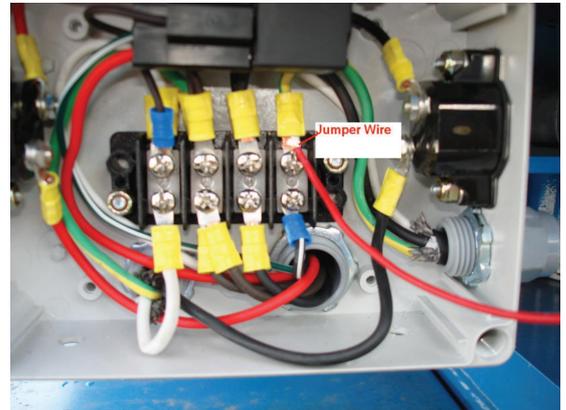

Step 4

Push the reset on the GFI.



Step 5

Remove jumper, and close the box.



Step 6